

# Mitsubishi Heavy Industries SRK ZE-Series

## DC PAM Inverter controlled large capacity cooling & heating systems

# 風

Allergen Clear  
Deactivates allergens

High COP  
Outstanding efficiency

3D Air  
Comfort to all corners



**SRK63ZEA-S**  
**SRK71ZEA-S**  
**SRK80ZEA-S**

SRKZEA-S Series


**HYPER INVERTER™**

high **COP**

**3<sup>air</sup>D**



Vertical and horizontal air scroll

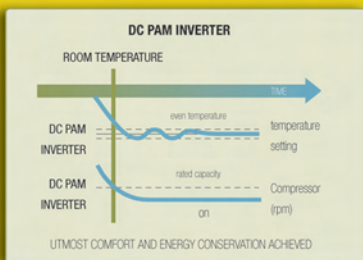

- Up/Down** UP / DOWN FLAP SWING
- High Power** HIGH POWER OPERATION
- 24 HOURS** 24 HOUR TIMER
- Memory** MEMORY FLAP
- Quiet** ECONOMY OPERATION
- ON TIMER** ON TIMER
- MC** MICROCOMPUTER OPERATED DEFROSTING
- DRY** DRY OPERATION
- OFF TIMER** OFF TIMER
- HORIZONTAL SWING** HORIZONTAL AIR
- Blue Fin** BLUE FIN
- Self** SELF DIAGNOSTIC FUNCTION
- 3Hot** THREE HOT SYSTEM
- Restart** POWER BLACKOUT RESTART FUNCTION
- Auto Flap** DETACHABLE INDOOR UNIT SUCTION GRILL
- Auto Flap** AUTO FLAP MODE
- F** FUZZY AUTO MODE
- AUTO** AIR SCROLL
- AUTO** AUTO SELECT COOL / HEAT / DRY
- SELF CLEANING** SELF CLEANING
- WIRED CONTROL** WIRED CONTROL
- CNT** CNT
- Back-up Switch** BACK UP SWITCH


**TOP ENERGY SAVER AWARD**  
A joint government & industry program

**ENERGY ENDORSEMENT**  
Mitsubishi Heavy Industries Air Conditioners

This label is awarded to appliances that are among the most energy efficient on the market in their class at the time of testing. For more information and to compare appliances, refer to: [www.energyrating.gov.au](http://www.energyrating.gov.au)

**WINNER 2005**

**Jet flow technology**

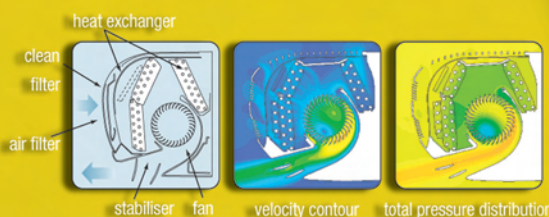

**Superquiet 26dB(A)**

\* SRK71&80ZEA-S

SRK63 & 71 ZEA-S



# 風



SRK63ZEA-S



SRK71ZEA-S



SRK80ZEA-S

## R410A WALL MOUNTED TYPE / SINGLE SPLIT INVERTER SPECIFICATIONS

Item			Power Source AC 230V 50Hz Single Phase			
Model (Indoor/Outdoor)			SRK63ZEA-S / SRC63ZEA-S	SRK71ZEA-S / SRC71ZEA-S	SRK80ZEA-S / SRK80ZEA-S	
operation data	Cooling Capacity		kW	0.900-7.100	0.900-8.000	0.900~8.400
	Cooling Nominal (50% part load)		kW	6.300 (3.150)	7.100 (3.550)	8.000 (4.000)
	Sensible Capacity		kW	5.000	5.600	5.850
	Dehumidifying Factor		kW	1.300	1.500	2.150
	Power Input		kW/hr	1.840 (0.600)	2.210 (0.710)	2.840 (0.840)
	EER			3.42 (5.25)	3.21 (5.00)	2.82 (4.76)
	Energy Label (star label)			★★★★★	★★★★★	★★★
	Sensible Heat Ratio			0.79	0.78	0.73
	Current		Amps	7.7	9.3	12.0
	Sound Pressure Level JIS*	Indoor	dB(A)	Hi 43, UL <sub>o</sub> 26	Hi 45, UL <sub>o</sub> 26	Hi 46, UL <sub>o</sub> 26
		Outdoor		47	52	54
	Sound Power Level†			58	63	69
	Heating Capacity		kW	0.900-9.000	0.900-10.500	0.900~10.800
	Heating Nominal (50% part load)		kW	7.100 (3.550)	8.000 (4.000)	9.000 (4.500)
	Power Input		kW/hr	1.860 (0.690)	2.210 (0.790)	2.740 (0.930)
	COP			3.82 (5.14)	3.61 (5.06)	3.28 (4.84)
	Energy Label (star label)			★★★★★	★★★★★	★★★★
	Current		Amps	7.8	9.3	11.5
	H2 Capacity		kW	7.000	7.350	7.800
	H2 Power Input		kW/hr	2.390	2.690	2.980
H2 COP			2.92	2.73	2.62	
indoor	Outline Dimensions		HxWxD mm	318 x 1098 x 248	318 x 1098 x 248	318 x 1098 x 248
	Net Weight		kg	18	18	18
	Air Flow At High	Cooling	Ltrs/sec	310	333	340
		Heating	Ltrs/sec	350	375	375
	Polypropylene Net Filter			x2	x2	x2
	Allergen Clear Filter			x1	x1	x1
	Photo-catalytic Deodourising Filter			x1	x1	x1
	Ionising Tourmaline Sheet			x1	x1	x1
	Drain Hose		mm	16	16	16
outdoor	Outline Dimensions		HxWxD mm	750 x 880 x 340	750 x 880 x 340	750 x 880 x 340
	Net Weight		kg	65	65	65
	Compressor			Twin Rotary	Twin Rotary	Twin Rotary
	Refrigerant Controller			EEV	EEV	EEV
	Refrigerant Qty (R410A)		kg	1.9 (pre-charge 15m)	1.9 (pre-charge 15m)	1.9 (pre-charged to 15m)
	Maximum Distance Piping		m	30	30	30
	Maximum Height Difference		m	20	20	20
	Refrigerant Piping	Liquid line	mm	6.35	6.35	6.35
		Gas line	mm	15.88	15.88	15.88
	Connecting Method			Flare	Flare	Flare
	Power Source Supply			Terminal block screw fix	Terminal block screw fix	Terminal block screw fix
Connection Wiring		Size x Core number	1.5mm x 4 cores (inc earth)	1.5mm x 4 cores (inc earth)	1.5mm x 4 cores (inc earth)	
Connection method			Terminal block screw fix	Terminal block screw fix	Terminal block screw fix	

Range of operation: Cooling -15°C to 43°C, Heating -15°C to 20°C \* Japanese Industry Standard. † AS/NZS1217  
Because of our policy of continuous improvement, we reserve the right to make changes in all specifications without notice.



**ISO9001**  
Our Air Conditioning and Machinery Works is an ISO9001 approved factory for residential air conditioners and commercial-use air conditioners (including heat pumps).



**ISO14001**  
Our Air Conditioning and Machinery Works has been assessed and found to comply with the requirements of ISO14001.



Performance and efficiency data in accordance with AS/NZS 3823.1.1 T1



Distributed by

**temperzone limited**

**AUCKLAND**  
Ph. 0-9-279 5250  
Fax 0-9-275 5637

**WELLINGTON**  
Ph. 0-4-569 3262  
Fax 0-4-566 6249

**CHRISTCHURCH**  
Ph. 0-3-379 3216  
Fax 0-3-379 5956

www.temperzone.co.nz